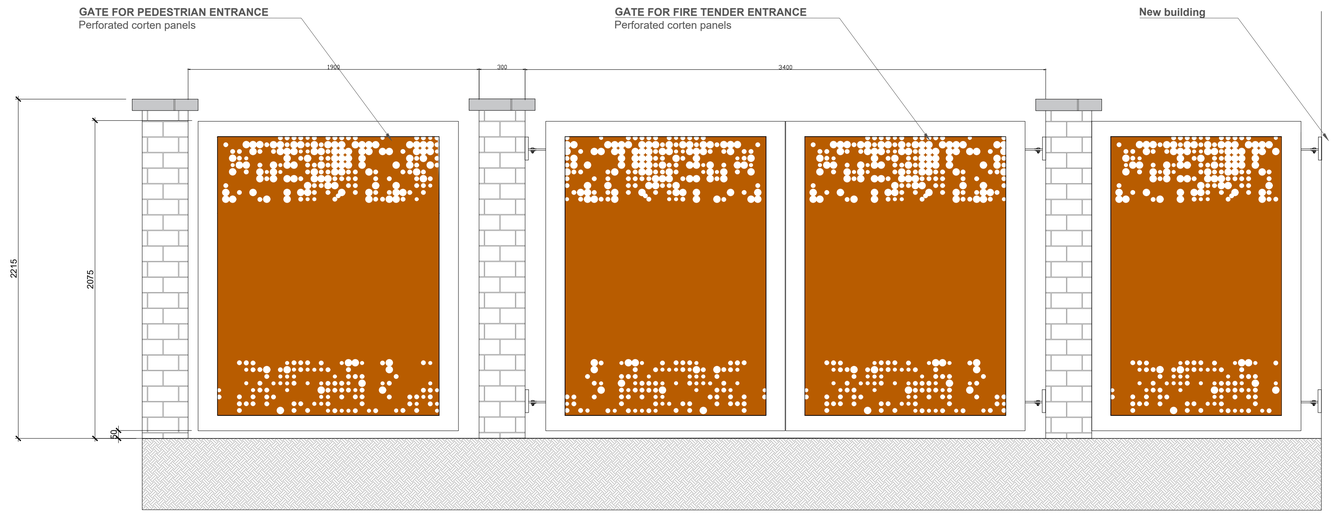

GATE 1 - FIRE TENDER AND PEDESTRIAN ENTRANCE

01
406

GENERAL SPECIFICATIONS
Conceal fixing of the PPC MS panels should include hinges, latching provision for the doors, flush pulls
Shop drawings to be approved prior to manufacture

SPECIFICATION REGARGING THE VENTILATION OF THE GAS ENCLOSURE
Ventilation must be provided to atmosphere. In the case of a solid door, vents must be located at the top and the bottom of the door. Each vent must provide a minimum of 50 cm² free area. Final ventilation free area to be confirmed by Mechanical & Electrical engineer
Metal screens would be cut to the patter described in Detail 1 in order to provide the ventilation required.

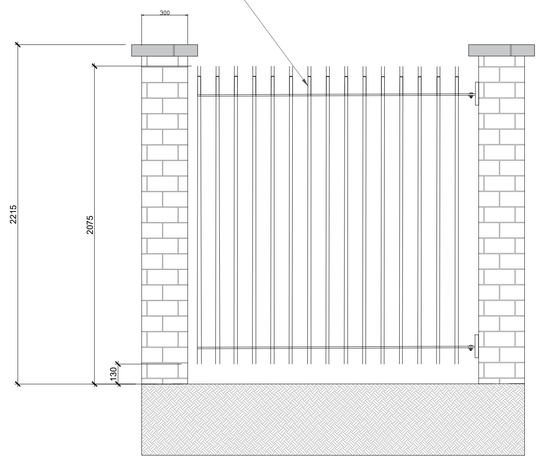

GATE 2 - PEDESTRIAN BACK ACCESS TO PUBLIC PATH

02
406

REV	DESCRIPTION	ISSUED BY	DATE

MITCHELL + ASSOCIATES
LANDSCAPE ARCHITECTURE URBAN DESIGN
Unit 5, Woodpark, The Rise, Glasnevin, Dublin 9, Ireland t: + 353 1 454 5066 e:info@mitchellassoc.net

PROJECT
RICHMOND ROAD

CLIENT
HOLLYBROOK HOMES

JOB NO.
RIC0001

DRAWING
GATES

DRAWING NO.
LRIC-MA-XX-XX-DR-L-405

DRAWN BY	CHECKED	DATE
COLINE FORTIN	AH	07.12.2021
STATUS: PLANNING	**SCALE** 1:20 @ A1	**REVISION** 00

NOTES:
All dimensions are in millimeters unless otherwise stated and shall be checked and confirmed by the contractor on site. Any discrepancies shall be immediately reported to the landscape architects. Work to figured dimensions only - Do not scale from drawing. Do Not Scale. Use Figured Dimensions Only. Not for Construction Purposes unless Specifically Marked.

© THIS DRAWING IS COPYRIGHT OF MITCHELL + ASSOCIATES